

ALURACK TOPCASE CARRIER

KAWASAKI KLR 650
US-Model (2008-2018)

Item-No.: 650206 01 01 black



Assembling instructions

- | | | |
|---|-----------|------------------------------|
| 1 | 700007650 | adapter plate |
| 1 | 700006881 | Alurack |
| 1 | 700006882 | bow for Alurack |
| 1 | 700006883 | plastic cover for rack |
| 1 | 700011384 | screw kit: |
| 4 | | allen screw M6 x 12 |
| 4 | | countersunk head screw M6x30 |
| 2 | | countersunk washer Ø6,4 |
| 2 | | washer ø18 x ø6,4 |
| 2 | | washer ø12 x ø6,4 |
| 4 | | self-nock nut M6 |
| 4 | | alu spacer ø13 x ø7 x 8 mm |

Tip:

Fit all parts and screw on not too strong.
After mounting all parts, the screws should be
tightened to the torque specified.
This guarantees, that the kit is mounted
without tension.



180811/180225

ALURACK TOPCASE CARRIER

KAWASAKI KLR 650
US-Model (2008-2018)

Item-No.: 650206 01 01 black



Assembling instructions


Preparing:

Dismantle the original screws of the rear rack - screws are obsolete.
Sandwich spacer $\varnothing 13 \times 7 \times 8$ mm into the borings.

Fastening of the adapter plate:

front with countersunk washers $\varnothing 18 \times \varnothing 6,5$ and countersunk screws M6 x 30.

Rear point: with countersunk screws M6 x 30.



4x





2x



4x

1

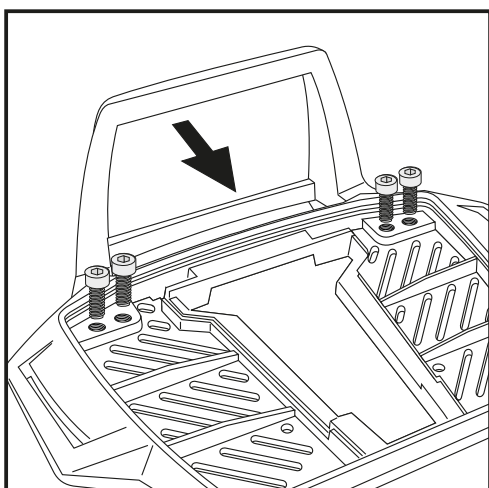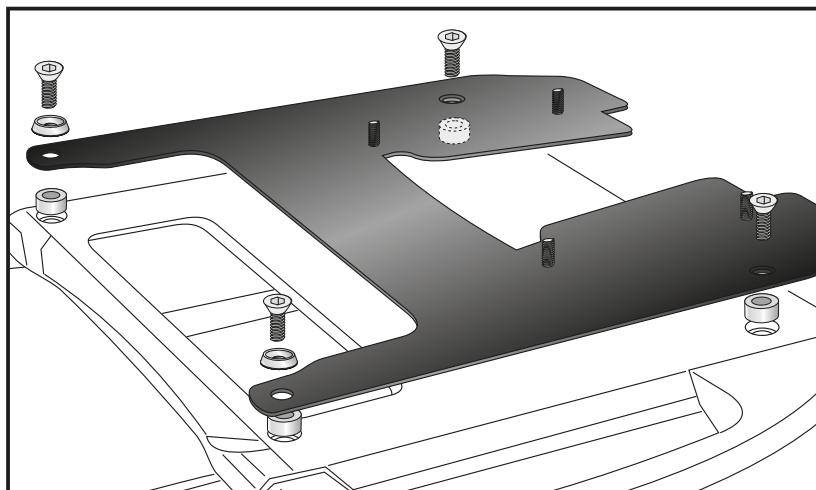


2

Fastening of the bow for the rack:

Fix the bow to the rack with allen screws M6 x 12.

NOTICE:

The bow is only needed in use with a Hepco & Becker topcase.



4x

ALURACK TOPCASE CARRIER

KAWASAKI KLR 650
US-Model (2008-2018)

Item-No.: 650206 01 01 black



Assembling instructions

Fastening of the alu-rack:

Front: ①



with washer Ø12 x Ø6,4 and self-lock
nuts M6.

Rear: ②

Ø18 x Ø6,4 and self-lock nuts M6.

Mount the plastic cover.

7

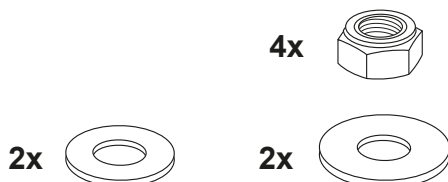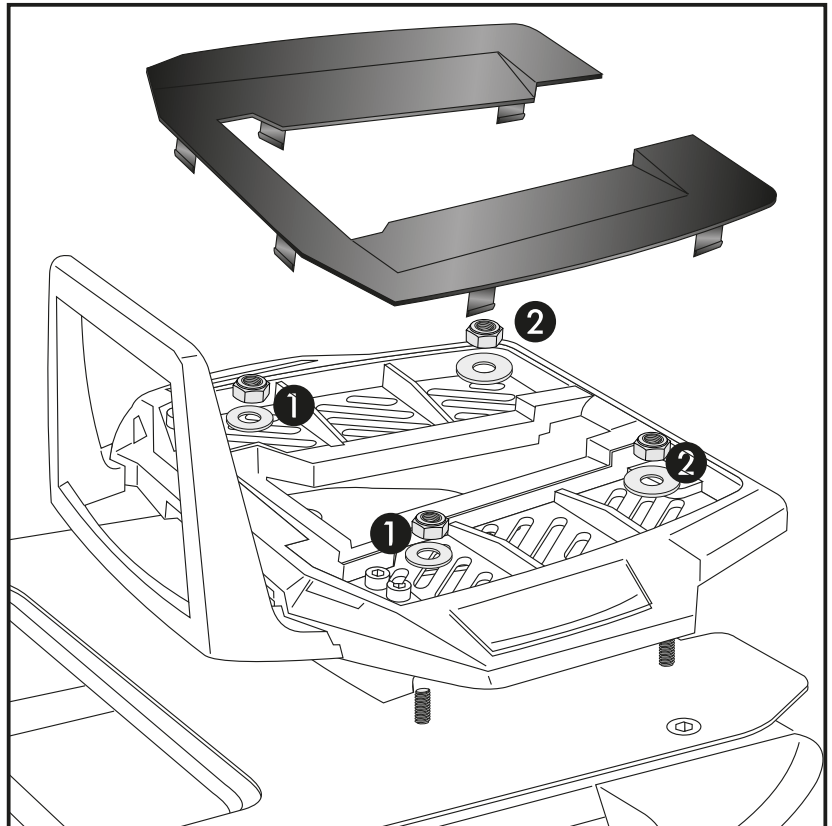

Control all screw connections after the assembling for tightness!
Please notice our enclosed service information.

More accessories: www.hepco-becker.de



Hepco & Becker GmbH
An der Steinmauer 6

D-66955 Pirmasens

Tel.: +49 (0)6331 - 1453 - 100
Fax: +49 (0)6331 - 1453 - 120
eMail: vertrieb@hepco-becker.de
www.hepco-becker.de